



SIRCO PV

Disconnect switches for photovoltaic applications
from 100 to 3200 A, up to 1500 VDC

UL 98B & IEC 60947-3



your energy
our expertise



 **socomec**
Innovative Power Solutions

You deserve **safe & reliable** PV installations

As a PV expert, you are challenged to differentiate yourself from the global competition with geographical disperse markets. Photovoltaic energy producers demand equipment and installations that combine a high production output, consistent reliability and safety with a low maintenance cost. Besides a high-efficiency production, the equipment must support the specificity and technical constraints of the severe environments related to solar applications. Specifically designed for photovoltaic applications, SIRCO PV solar disconnect switches have been tested for use in applications with high performance characteristics that meet or exceed of the latest industry standard requirements.



SOCOMEK - your **best asset**

European industrial group

- Created in 1922.
- Over 3100 employees.
- Present on five continents.

A culture of independence

- Family shareholders.
- Full control of the decision-making process.
- Respect for human values.

The spirit of innovation

- 10 % of turnover is reinvested in R&D.

A flexible manufacturing structure

- Competitive production sites.
- Lean Management.
- Lead times, quality and cost guaranteed.

The vision of a specialist

- Expertise in technological modules.
- Custom adaptations to customer requirements.

A focus on service

- Advice, interventions, training.
- Teams located across the globe.


**ENERGY
SPECIALIST**
SINCE **1922**



SIRCO PV

A complete offer for any photovoltaic application
The spirit of innovation combined with proven technology

As an expert in solar switching equipment, SOCOMEC has the specialised know-how for implementing key strategic functions in PV facilities.

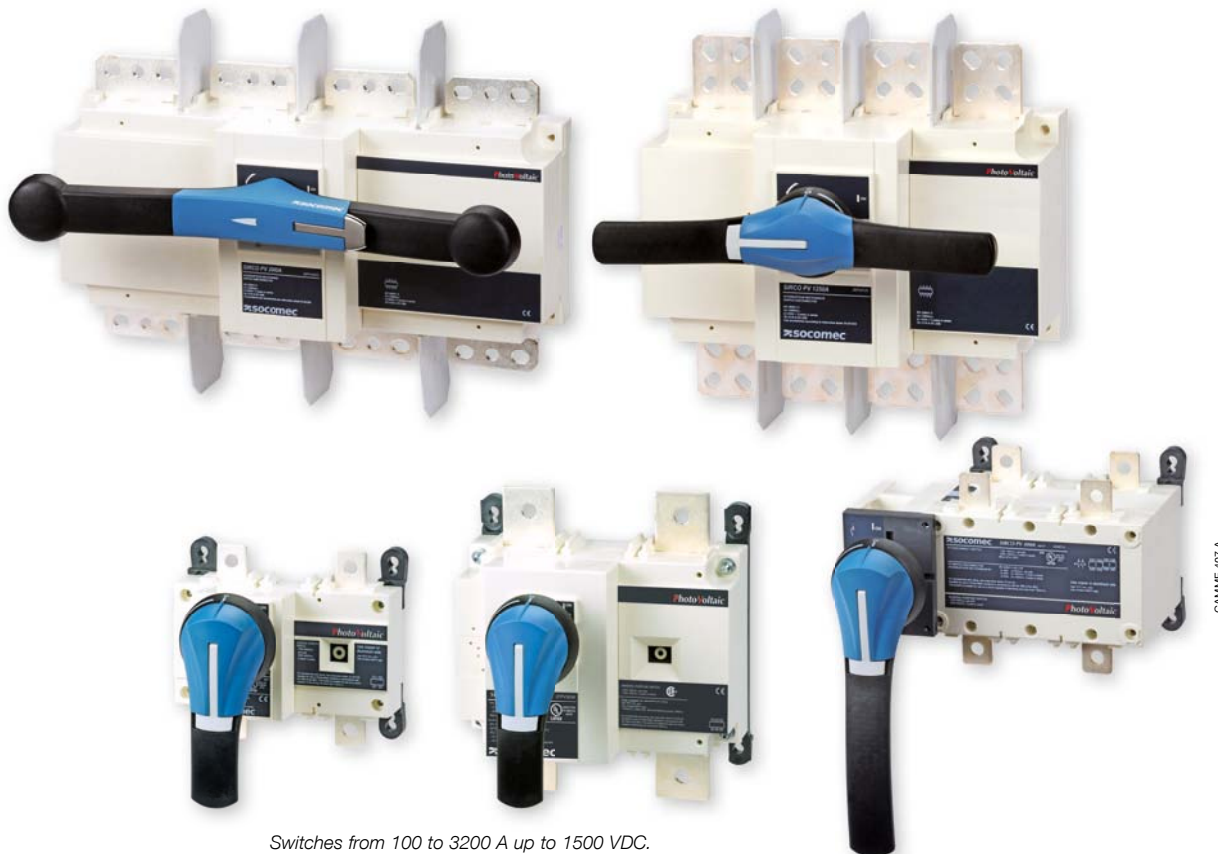

Switches from 100 to 3200 A up to 1500 VDC.

Four key applications: the know-how of a specialist

Ensuring the availability and storage of high quality power.



Managing power and protecting persons and facilities.


Managing the energy performance of buildings.




Enabling available, safe and efficient energy.

New patented switching technology to break 500 VDC per pole

Most PV systems today are designed at 1000 VDC. Our new range of switches allows on-load breaking of 1000 VDC on just 2 poles. This innovation provides an extremely compact solution.

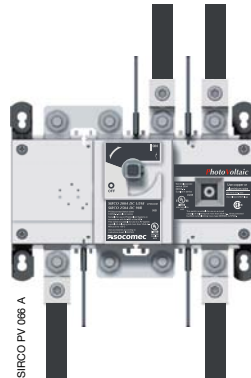

Classic solution
Example of connection of a 1000 VDC disconnect.

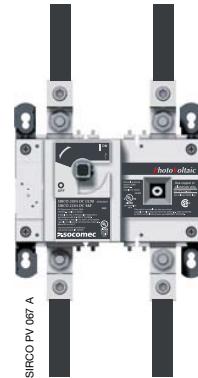

New
With our new range we can break 1000 VDC with 2 poles in series.

Optimise your investment


- Limit costs by reducing the number of jumpers per device.
- Gain time by having a less number of jumpers to install.
- Reduce the overall heat dissipation of the switch. A 2 pole SIRCO PV switch takes direct advantage of this, leading to **possibility to use a smaller enclosure**.

Limit potential risk

PV equipment is subject to extreme variation in temperature. Point of connection are therefore subject to potential loosening of connection due to breaking cooling effect. Limiting the number of poles greatly reduces the risk of a loose connection.

Allows to disconnect up to 4 circuits with one switch ("The Worlds first")

A compact and cost effective solution for recombinaer applications. Allows to break up to 24 circuits by respecting the NEC article 690.

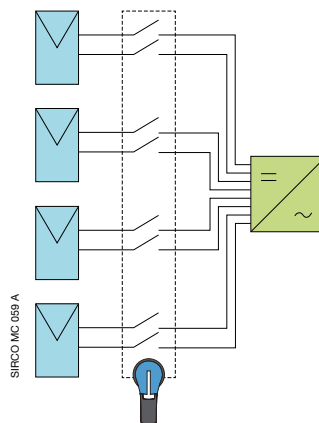

4 MPPT switches, 4 circuits are switched together.




SIRCO PV 350 A
1000 VDC 4 circuits.


Achieving 1500 VDC characteristics in a compact footprint

SOCOMECC's new technology enables utilisation at 1500 VDC by connecting three poles in series.

- Each pole of a switch has a maximum voltage breaking capacity. To break a high DC voltage it is necessary to connect poles in series. The global on-load breaking capacity of a switch is determined by multiplying the max voltage breaking capacity per pole by the number of poles in series.
- Paralleling the poles on our double-stack design permits a higher current rating to be achieved.



SIRCO PV 400 A
1500 VDC.



SIRCO PV 800 A
1500 VDC with a 400 A
double stack switch.


Benefit from the experience of a world leader in industrial switching

PV applications are one of the most stringent for disconnect switches. Extreme fluctuations in temperature, condensation, dust, UV exposure and oversized connection cables stress components. Our SIRCO range has been adapted to exceed industry standards and current solutions fully take into account the specific requirements of PV applications.


■ Guarantee isolation over time

Today most photovoltaic systems operate at 1000 VDC with voltages now moving towards 1500 VDC.

Aging of plastic due to high fluctuations in temperature combined with external elements (dust, condensation) may through time increase the risk of electrical breakdown. The creepage distance over insulation material between live parts is key in preventing this. SOCOMEC decided to exceed the requirements of IEC standard and increased this distance from 25 mm to 53 mm. A distance of 50 mm/2 inches is the mandatory distance comply with UL standards.

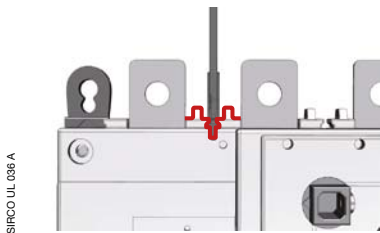

SOCOMECS design with 53 mm creepage distance over surface. This is true externally as well as internally.

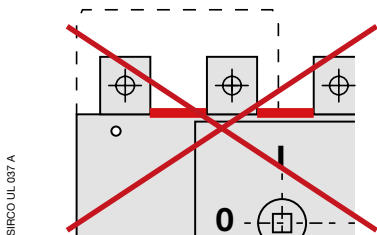

Other manufacturers concept as often with a shorter distance. Note that external shrouding does not extend the creepage distance.

■ Ensure safe operation



The mechanism is completely independent from manual operation and provides quick make & quick break operations, thereby reducing the arc duration.

A reliable position indicator clearly shows the true state of the switch contacts.

■ Long lasting stable raw material

SIRCO PV is an extremely robust product, with all casings made from fiber glass reinforced polyester materials that allows:

- high mechanical withstand,
- high stability to temperatures (RTI of 130 °C),
- high dielectric performance (high CTI/tested according to ASTM D 2303).

The SIRCO PV range includes a heavy duty assortment of handles

- Door interlocked the ON position.
- Possibility to defeat the door interlock with the use of a tool.
- Padlockable in the OFF position whilst including a door interlock.
- High index of protection: up to IP65 IEC and 4, 4X UL.
- UV rated according to UL50.



A fully tested range...

Using tested and certified components is key for the success of the design for any photovoltaic system. The SIRCO PV range is tested and certified according to main standards used in the photovoltaic industry.


Global approvals

Our SIRCO PV solar disconnect range meets UL98B, IEC947-3 Standards and bear the CE mark. Using the SOCOMEC range in your design is therefore a unique opportunity to standardise your components and use the same switches on 5 continents.



PV critical current

Under particular conditions (cloudy, days, evenings...) PV systems can deliver a low current at high voltage. This type of current is extremely difficult to interrupt. Standard AC or DC products are usually not tested in these particular conditions and could therefore be unable to interrupt low currents at high DC voltage. If the electrical arc produced is not interrupted it may result in operator injury or fire. The SIRCO PV range has been specifically designed and tested to interrupt the current under all current/voltage conditions.




Current (I)/Voltage (V) curve of a PV system. When the current decreases (in the evening or when cloudy) the voltage may increase. SC = Short-circuit, OC = Open-circuit

Short Circuit

The complete range is tested to withstand a short circuit of 10 kA for a duration of 50 ms without any specific protection. This allows the use of any overcurrent protection device for line protection.

Thermal current test

Thermal tests have been performed according to both IEC and UL standards.



According to UL Standard 98B, the maximum difference authorised between T1 (temperature of terminals) and T2 is 40 °K when the switch is fully loaded.



According to IEC947, switches are tested in free air. Maximum temperature elevation on terminals is 70 °K.

**OUR SWITCHES ARE CERTIFIED
UP TO 60 °C AMBIENT WITHOUT
DERATING**

One of Europe's largest power laboratories


Tesla Lab laboratory has guaranteed the reliability and compliance of Socomec products since 1965. Accredited by COFRAC, UL (CTDP), CSA and DEKRA (WMT), it also works in partnership with certification organisations such as ASEFA and LOVAG to ensure that the safety and quality requirements in specific countries are addressed fully.








... for all your PV applications

The SIRCO PV range will provide safe disconnection and isolation at all levels of your PV installation.

Typical PV architecture

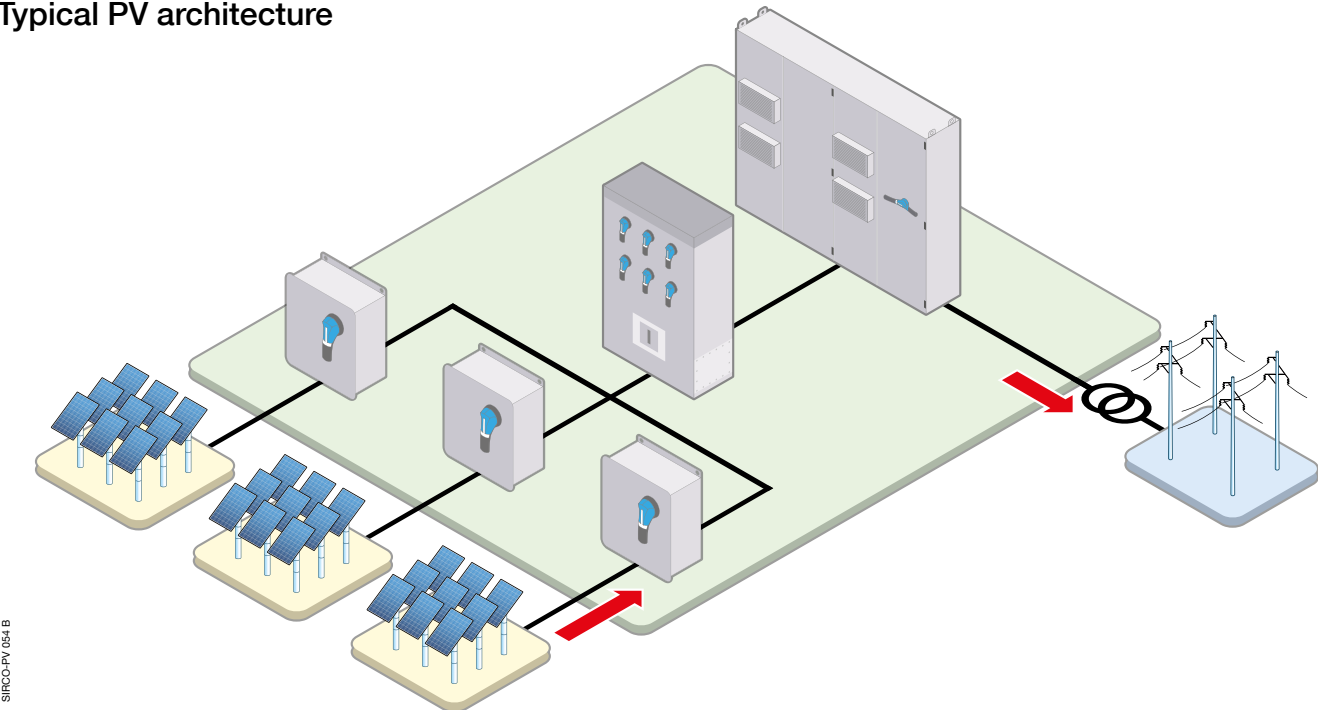

SOCOMEK solutions

LEVEL OF INSTALLATION	SOCOMEK SOLUTIONS	
Combiner box		 SIRCO PV One circuit 100 to 500 A up to 1500 VDC
Recombiner box		 SIRCO PV 4 circuits 100 to 500 A at 1000 VDC 2 circuits 100 to 500 A at 1500 VDC
Inverter		 SIRCO PV One circuit 100 to 3200 A at 1000 VDC 100 to 3200 A at 1500 VDC

The widest range on the market

Which
standard ?

		IEC 60947-3							
		100 A		160 A		250 A		315 A	
		26PV 2010	B4	26PV 2016	B4	26PV 2025	B4	26PV 2031	B4
1 circuit	up to 1000 VDC		2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾
	1500 VDC	27PV 3026 275 A B5						27PV 3032	B5
									
		3P ⁽²⁾							
2 circuits	up to 1000 VDC	26PV 5010	B4ds	26PV 5016	B4ds	26PV 5025	B4ds	26PV 5031	B4ds
			2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾
	1500 VDC	27PV 6026 275 A B5ds							
									
		3P ⁽²⁾							

UL98B		IEC 60947-3							
		100 A		200 A		250 A		325 A	
1 circuit	up to 1000 VDC	27PV 2009	B4	27PV 2019	B4	27PV 2024	B4	27PV 2032	B5
			2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾		2P ⁽²⁾
	1500 VDC ⁽¹⁾	27PV 3026 275 A B5						27PV 3032	B5
									3P ⁽²⁾
2 circuits	up to 1000 VDC	27PV 5009	B4ds	27PV 5024	B4ds	27PV 4032		B5	
			2P ⁽²⁾		2P ⁽²⁾			2P ⁽²⁾	
	1500 VDC ⁽¹⁾	27PV 6026 275 A B5ds						27PV 6032	B5ds
									3P ⁽²⁾

4 circuits 1000 VDC - Ref. 27PV 8026, IEC 275 A - UL 275 A
Ref. 27PV 8039, IEC 500 A - UL 350 A.
1 circuit 1000 VDC 3200 A is also available, please contact us.

(1) The 1500 VDC range is self-certified based on 1000 VDC UL standards at 1500 VDC. The UL standard at 1500 VDC has not yet been released.
 (2) Number of poles to reach the characteristic indicated per PV circuit.

How many
circuits ?

Which
voltage ?

Which
rating ?

400 A		500 A		630 A		800 A		1250 A		2000 A	
26PV 4040	B4	26PV 4050	B4	26PV 4063	B5	26PV 4080	B5	26PV 4120	B6	26PV 4200	B7
	4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾
27PV 3032	B5	27PV 3039	B5	26PV 8063	B5Ds	26PV 8080	B6Ds	26PV 8120	B6Ds	26PV 8200	B7Ds
	3P ⁽²⁾		3P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾
27PV 4032	B5	27PV 4039	B5	26PV 8063	B5Ds	26PV 8080	B6Ds	26PV 8120	B6Ds	26PV 8200	B7Ds
	2P ⁽²⁾		2P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾
27PV 6032	B5Ds	27PV 6039	B5Ds								
	3P ⁽²⁾		3P ⁽²⁾								

400 A		600 A		800 A		1200 A		2000 A	
27PV 2039	B5	27PV 4060	B6	27DC 4081	B7	27DC 4121	B7	27DC 4201	B7
	2P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		8P ⁽²⁾
27PV 3039	B5	27PV 8060	B6Ds	27DC 8081	B7Ds	27DC 8101 1000 A	B7Ds		
	3P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		8P ⁽²⁾		
27PV 4039	B5	27PV 8060	B6Ds	27DC 8081	B7Ds	27DC 8101 1000 A	B7Ds		
	2P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		4P ⁽²⁾		
27PV 6039 350 A	B5Ds								
	3P ⁽²⁾								

The **PV** range

A complete offer of load break switches for photovoltaic applications from 25 to 3200 A

SIRCO MC PV from 25 up to 45 A - 1000 VDC

Compact

Thanks to its compact design, the limited space within the combiner box or the solar inverter maybe utilised better.

High breaking capacity up to 1000 VDC

- Making and breaking capacity under load conditions up to 1000 VDC.
- Specific photovoltaic test beyond IEC 60947-3 standard requirements.
- Compliant with UL 508i.

Safety

- Pre-bridging is factory installed for easier, quicker and safer connection.
- Direct access to connection terminals for adequate tightening.

Easy mouting

Three mounting possibilities are available for optimum integration and time saving.

- DIN rail or back plate mounting.
- Door mounting.
- Quick Fix mounting to save time when integrating into solar inverters.

Multi-circuit breaking

The SIRCO MC PV for double circuits enables connection of two independent PV panel strings to a single switch. This will reduce the cost of the overall solution.



SIRCO MOT PV up to 3200 A - up to 1500 VDC

Main characteristics


- Up to 1500 VDC.
- 2 stable positions (I, 0).
- AUTO/MANU selector.
- Padlocking in 0 position.
- Full range of accessories.

Remote disconnection system

With its remote motorised control, the SIRCO MOT PV can be utilised to provide safety disconnection for firefighters by meeting the remote disconnection requirements of the installation.

Manual emergency operation

In addition to its motorised operation, the SIRCO MOT PV also includes a manual operation facility, enabling the switch position to be changed on load in a safe and easy way.

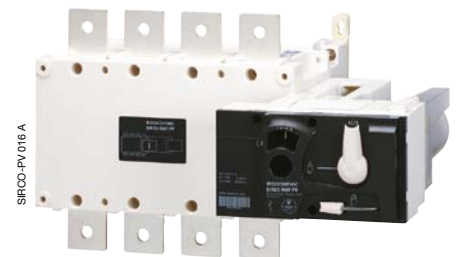

INOSYS **LBS** Load Break Switches incorporating tripping function from 160 to 1250 A, up to 1500 VDC

INOSYS LBS are multiple pole load break switches that have been specifically designed for PV applications that require a tripping function. They can be operated manually using the handle or remotely via tripping coils to disconnect part or all of the electrical installation.

They make and break under load conditions and provide safety isolation for any low voltage circuits up to 1500 VDC and are suitable for emergency switching.

To meet the requirements of harsh PV environments, the INOSYS LBS can be easily integrated in any location of the PV installation (combiner box, recombiner box or inverter) and are also particularly suitable for safety applications such as firefighter switches.

It's the right choice for PV and DC distribution applications that require a high reliability and low maintenance trip function through a shunt trip coil or an undervoltage release.



INOSYS 003 A



INOSYS 002 A



Also available

SIRCO

Load break switches for power distribution

- From 63 to 5000 A.
- Up to 690 VAC - AC23.
- Reliability and performance.
- Simplicity.
- Easy to install.



SIRCO-AC 001 A

ATyS

Remotely operated and automatic transfer switching equipment

- from 125 to 3200 A
- plug & play solution
- manual emergency control
- easy maintenance
- compliant with IEC 60947-6-1 & IEC 60947-3



ATyS-P 001 B

DIRIS

Multifunction meters

- Monitor all electrical parameters of the installation.
- Detects wiring errors.
- Compliant with IEC 61557-12 UL 61010-1.



DIRIS 744 A



Socomec worldwide

IN EUROPE

BELGIUM

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +32 2 340 02 30
Fax +32 2 346 28 99
info.be@socomec.com

FRANCE

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +33 1 45 14 63 00
Fax +33 1 48 67 31 12
dcm.ups.fr@socomec.com

GERMANY

Critical Power

Tel. +49 621 71 68 40
Fax +49 621 71 68 444
info.ups.de@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +49 7243 65292 0
Fax +49 7243 65292 13
info.scp.de@socomec.com

ITALY

Critical Power

Tel. +39 02 98 242 942
Fax +39 02 98 240 723
info.ups.it@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +39 02 98 49 821
Fax +39 02 98 24 33 10
info.scp.it@socomec.com

NETHERLANDS

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +31 30 760 0900
Fax +31 30 637 2166
info.nl@socomec.com

POLAND

Critical Power

Tel. +48 22 825 73 60
Fax. +48 22 825 73 70
info.ups.pl@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +48 91 442 64 11
Fax +48 91 442 64 19
info.scp.pl@socomec.com

PORTUGAL

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +351 261 812 599
Fax +351 261 812 570
info.ups.pt@socomec.com

ROMANIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +40 21 319 36 88
Fax +40 21 319 36 89
info.ro@socomec.com

SERBIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +381 11 40 43 246
Fax +381 11 40 43 245
info.rs@socomec.com

SLOVENIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +386 1 5807 860
Fax +386 1 561 11 73
info.si@socomec.com

SPAIN

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +34 93 540 75 75
Fax +34 93 540 75 76
info.es@socomec.com

SWITZERLAND

Critical Power

Tel. +41 44 745 40 80
Fax +41 44 745 40 85
info@socomec.ch

TURKEY

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +90 216 540 71 20-21-22
Fax +90 216 540 71 27
info.tr@socomec.com

UNITED KINGDOM

Critical Power

Tel. +44 1285 863 300
Fax +44 1285 862 304
info.uk@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +44 1462 440 033
Fax +44 1462 431 143
info.uk@socomec.com

IN ASIA PACIFIC

AUSTRALIA

Critical Power / Power Control & Safety

Tel. +61 2 9325 3900
Fax +61 2 9888 9544
info.ups.au@socomec.com

CHINA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +86 21 52 98 95 55
Fax +86 21 62 28 34 68
info.cn@socomec.com

INDIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +91 44 39215400
Fax +91 44 39215450 & 51
info.in@socomec.com

SINGAPORE

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +65 6506 7600
Fax +65 64 58 7377
info.sg@socomec.com

THAILAND

Critical Power

Tel. +66 2 941 1644 7
Fax +66 2 941 1650
info.ups.th@socomec.com

IN MIDDLE EAST

UNITED ARAB EMIRATES

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +971 4 29 98 441
Fax +971 4 29 98 449
info.ae@socomec.com

IN AMERICA

USA, CANADA & MEXICO

Power Control & Safety / Energy Efficiency

Tel. +1 617 245 0447
Fax +1 617 245 0437
info.us@socomec.com

OTHER COUNTRIES

NORTH AFRICA

Algeria / Morocco / Tunisia
info.naf@socomec.com

AFRICA

Other countries

info.africa@socomec.com

SOUTH EUROPE

Cyprus / Greece / Israel / Malta
info.se@socomec.com

SOUTH AMERICA

Tel. +34 93 540 75 75
info.es@socomec.com

MORE DETAILS

www.socomec.com/worldwide

HEAD OFFICE

SOCOMECS GROUP

SAS SOCOMECS capital 10 686 000 €
R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse
F-67235 Benfeld Cedex - FRANCE
Tel. +33 3 88 57 41 41
Fax +33 3 88 74 08 00
info.scp.isd@socomec.com

YOUR DISTRIBUTOR / PARTNER

www.socomec.com

your energy
our expertise



ENERGY
SPECIALIST
SINCE 1922

socomec
Innovative Power Solutions