


Enclosed Transfer Switches

ATyS Bypass

40 to 3200 A

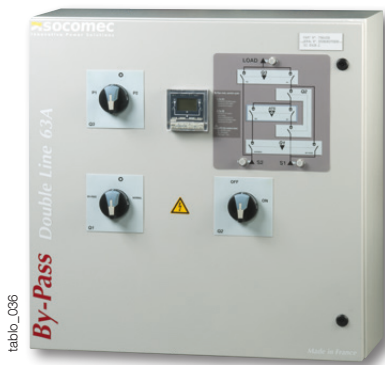

tablo_036



tablo_035

Function

- Automatically transfers to the available source to ensure continuity of the supply to life safety and critical loads such as sprinklers, firefighting/evacuation lifts, water pumps, etc.
- Assures continuity of service during preventative, maintenance and testing.
- Full isolation of the Automatic Transfer Switch ensures that maintenance work can be carried out safely without interruption to the load.

General features

- 40 to 3200 A, 4-pole.
- 230/400 VAC $\pm 20\%$, 50/60 Hz (ATS is self-powered from incoming sources).
- Class PC Automatic Transfer Switch.
- No-break bypass solution.
- Voltage and frequency monitoring of both sources.
- Phase rotation and neutral position control.
- Bi-stable output relay for genset start/stop command (NO/NC).
- Remote position control (I, 0, II) with dry contact.
- Manual emergency operation.
- Volt-free programmable outputs for BMS/remote indication.
- ATS and bypass switch auxiliary contacts.
- Source availability, ATS position & status, and source measurements are displayed on the door-mounted D20 interface. Access to configuration parameters, test and control functions (password protected) is also available via the D20.
- ATS Bypass are required for compliance with installation standards **BS 9999:2017** and **BS 8519:2020**, where occupation of the building is conditional upon the availability of the life safety and fire-fighting equipment.
- RS485 JBus/Modbus communication (as standard).
- ATS Auto/Manual selector.
- Degree of protection: IP41 as standard (others available on request).
- Hinged door with 3 mm double bar locking.
- Mounting: $\leq 160A$ wall-mounted (brackets supplied loose), $\geq 250A$ floor-mounted on feet.
- D20 remote interface (door-mounted).
- Mimic panel (3 LEDs for live voltage on source 1, source 2, and load; optional 15/17-LED mimic panel).
- Protection against direct contact from each functional unit.
- Enclosure material: Steel.
- Colour: RAL 7035 epoxy powder coating.

The solution for

- > Data centres
- > Energy generation
- > Healthcare buildings
- > High-rise buildings
- > Banks and insurance companies
- > Transport



Strong points

- > No-break bypass solution prevents interruption to the load when switching to bypass.
- > IEC 61439-2 type tested solution
- > Continuity of service for critical and life safety applications

Compliance with standards

- > IEC 61439-2
- > IEC 60947-6-1
- > IEC 60947-3
- > BS 60947-6-1



Expert Services

Technical site audit, solution specification, advice, commissioning, maintenance, training, etc. Our Expert Services extend to a complete offer of customised services to make your project a success.



2 model versions

ATyS Single Line Bypass

- Comprises an Automatic Transfer Switch and a priority source bypass line. Bypass and isolation of the ATSE can be performed without interruption to the load.


ATyS Double Line Bypass

- Comprises an Automatic Transfer Switch, a priority source bypass


line and an alternative source bypass line. Priority source bypass, and isolation of the ATS, can be performed without interruption to the load.

- The addition of the alternative bypass line allows the backup source to be selected during maintenance work, should the priority source fail. ATyS Double Line Bypass provide an extra layer of power availability for the most critical applications.

ATyS Bypass - SINGLE LINE

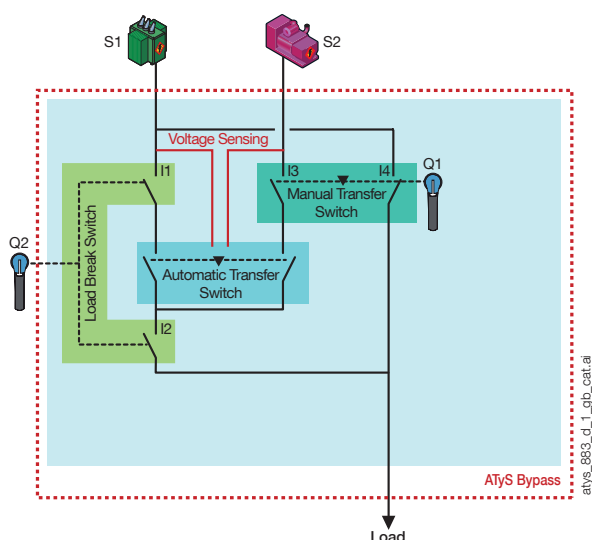

ATyS Bypass - DOUBLE LINE

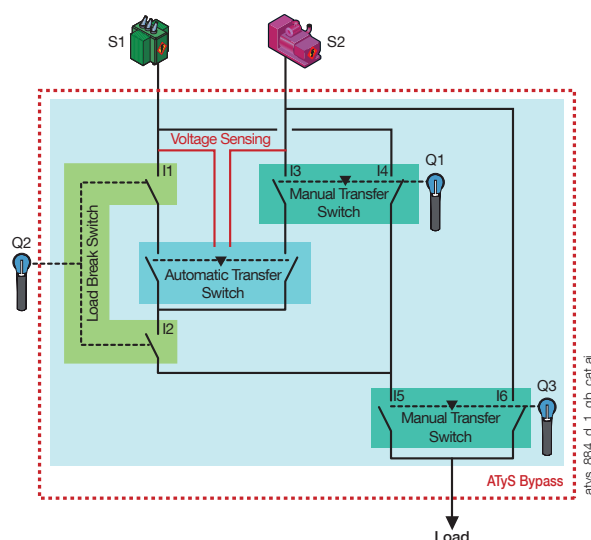

Functions

Normal position:

- The load is supplied by the priority source (S1). In the event of priority source failure, the ATS will automatically transfer to the alternative source (S2) when it is available.

Bypass position:

- Operating Q1 to Bypass creates a direct connection between the priority source (S1) and the load, without causing interruption. Opening switch Q2 provides complete isolation of the ATS from the sources and the load, thereby ensuring maintenance safety.
- Operating Q3 (Double Line only) to Bypass creates a direct connection between the alternative source (S2) and the load.
- While in bypass, tests can be performed ($\geq 160A$) without interruption to the load.

References

Standard device - 230 VAC for ATyS p M

Rating (A)	No. of poles ⁽¹⁾	Single line Reference	Double line Reference
40	4 P	1785 4004	1786 4004
63	4 P	1785 4006	1786 4006
80	4 P	1785 4008	1786 4008
100	4 P	1785 4010	1786 4010
125	4 P	1785 4012	1786 4012

⁽¹⁾ Standard ATyS Bypass require a distributed neutral to power the ATS and other components (230 VAC). If no neutral is available, please contact us for a solution.

Standard device - 230 VAC for ATyS p

Rating (A)	No. of poles ⁽¹⁾	Single line Reference	Double line Reference
160	4 P	1785 4016	1786 4016
250	4 P	1785 4025	1786 4025
400	4 P	1785 4040	1786 4040
630	4 P	1785 4063	1786 4063
800	4 P	1785 4080	1786 4080
1000	4 P	1785 4100	1786 4100
1250	4 P	1785 4120	1786 4120
1600	4 P	1785 4160	1786 4160
2000	4 P	1785 4200	1786 4200
2500	4 P	1785 4250	1786 4250
3200	4 P	1785 4320	1786 4320

⁽¹⁾ Standard ATyS Bypass require a distributed neutral to power the ATS and other components (230 VAC). If no neutral is available, please contact us for a solution.

Enclosed Transfer Switches

ATyS Bypass

40 to 3200 A

Accessories

Customer fit

Designation	Reference
2 input/2 output plug-in programmable output module (ATyS p only)	1599 2001 ⁽¹⁾

(1) Maximum 3 modules can be installed.

Factory-fitted

Cable entry/exit configuration

Use

To permit any cable entry and exit configuration (e.g. top/top), specific mounting brackets (≤ 160 A) or a factory-fitted side extension cabinet (≥ 250 A) can be provided. For ≥ 250 A solutions, power terminals can be factory-mounted within the extension cabinet to facilitate connection. Please contact us for more information.



kdys_504

Surge protection

Use

Factory-fitted surge protection for either or both incoming sources is available on request.



sgys_069

Load measurement

Use

≥ 160 A: Factory-fit installation of current transformers on the outgoing side of the ATyS Bypass provides current, power and energy load measurements. Available on request.

Tin-plated bars


Use

≥ 250 A: For harsh environments, tinned copper can be factory-fitted in place of the standard copper bars. Please contact us for details.

Signalling

Use

For a full overview of the system's state, opt for a 17-LED (15 for single line bypass) mimic panel (live voltage LED per phase and switch positions). Available on request.



acces_275_b_1_x_cat

Factory-fitted (continued)

Connectivity

Use

≤125A: DIRIS Digiware M-70 gateway with WEBVIEW-M (Webserver) can be factory-fitted.

≥160A: Ethernet plug-in module (4825 0203) can be customer-fitted in place of the standard RS485 MODBUS module (plug-in Ethernet module populates 2 of the 4 ATyS p slots).

The above options provide the following:


- Remote Ethernet connectivity with real-time monitoring via a Web browser
- ATS status (position, mode, fault)
- Availability of sources (including measurements)
- Access to ATS parameters (viewing)
- ATS input and output status
- Event history

Easy Config System Software (free download)

allows the following to be performed via Ethernet connectivity:


- ATS parameter configuration⁽¹⁾
- Controls (remote transfers, auto inhibit, test ON/OFF load)⁽¹⁾

⁽¹⁾ Password required.

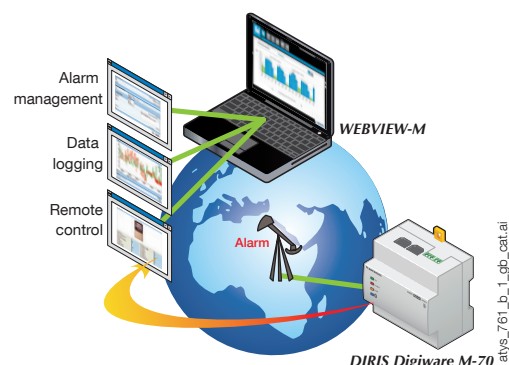

Dimensions


40 to 160 A

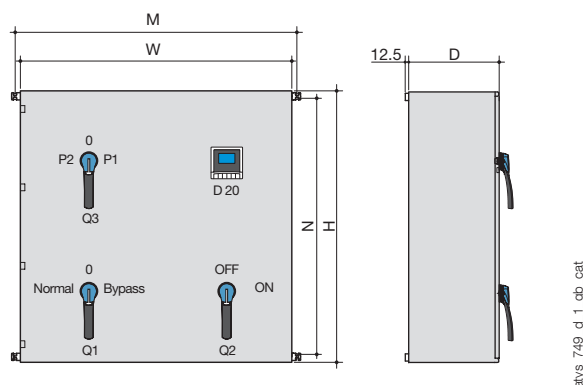

Wall-mounted

Rating (A)	Recommended cross-section (mm ²)	H (mm)	W (mm)	D (mm)	M (mm)	N (mm)	Weight (kg)
40	10	800	800	300	840	758	80
63	16	800	800	300	840	758	80
80	25	800	800	300	840	758	80
100	35	1000	800	300	840	958	80
125	50	1000	800	300	840	958	80
160	70	1000	800	400	840	958	160

≥ 250 A

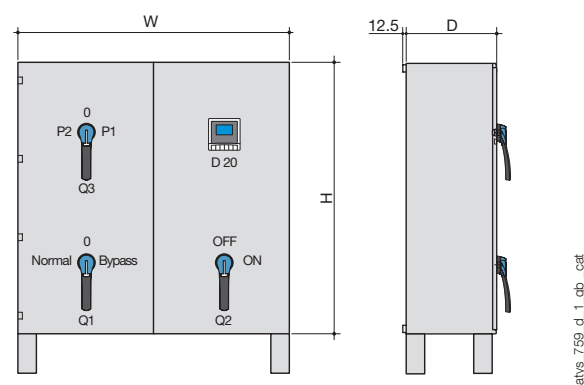

Floor-mounted

Rating (A)	Recommended cross-section (mm ²)	H (mm)	W (mm)	D (mm)	Weight (kg)
250	120	1200 ⁽¹⁾	1000	520	180
400	240	1200 ⁽¹⁾	1000	520	200
630	2 x 185	1600 ⁽²⁾	1200	600	600
800	2 x 240	1800 ⁽²⁾	1600	800	1000
1000	4 x 150	1800 ⁽²⁾	1600	800	1000
1250	4 x 185	2000 ⁽³⁾	2000	1000	2000
1600	4 x 240	2000 ⁽³⁾	2000	1000	2000
2000	8 x 150	2000 ⁽⁴⁾	2200	1000	2500
2500	8 x 185	2000 ⁽⁴⁾	2200	1000	2500
3200	8 x 240	2000 ⁽⁴⁾	2200	1000	2500

Connection (input/output)

- Standard cable entry and exit is at the bottom. Other configurations may, according to cable size, require specific mounting brackets (≤160A) or a factory-fitted side extension cabinet (≥250A). Please contact us for more information.

⁽¹⁾ Add 200 mm for the base feet.

⁽²⁾ Add 100 mm for the base feet.

⁽³⁾ Add 125 mm for the base feet.

⁽⁴⁾ Add 120 mm for the base feet (allow for an additional 160 mm for roof fan).