



AC analogue voltmeters

Indicators and transducers



voltm_014.eps

Compliance with standards

- > IEC 60051-1
- > IEC 60414
- > NF EN 60051-1
- > DIN 43780
- > NF C 42-010
- > VDE 0410
- > BS 5448
- > BS 89



Function

SUCOME **ferromagnetic voltmeters** measure the AC voltage of any electrical circuit. They are embedded in the front panel of cabinets, enclosures or other equipment.

Characteristics


- Pointer deflection: 90°.
- Insulating voltage: 660 V.
- Dielectric quality: 2 kV - 50 Hz - 1 mn.
- Consumption: 3 VA.
- Operating frequency: 45/65 Hz.
- Connection: screw or fast-on lugs.

Composition of the range

	Case	DIN 48-72-96	ROTEX 72-96
	Pointer deflection	90°	90°
	Connection	direct	direct
Rating			
0 - 150 V		•	•
0 - 250 V		•	•
0 - 300 V		•	•
0 - 500 V		•	•
0 - 600 V		•	•


Case

DIN

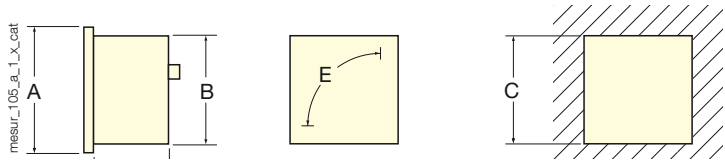


Pointer deflection: 90°				
A	B	C	D	E
48 x 48	44.5 x 44.5	45 ^{+0.6}	59	38
72 x 72	66.5 x 66.5	68 ^{-0.7}	58	65
96 x 96	89 x 89	92 ^{-0.8}	58	100

ROTEX

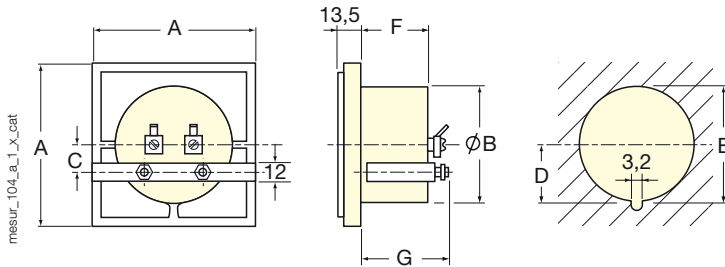

Pointer deflection: 90°						
A	B	C	D	E	F	G
72 x 72	54.5	11	28.5	56 ^{±0.5}	34.5	50.8
96 x 96	68	21.6	35.5	70 ^{±0.5}	34.5	50.8

Connections

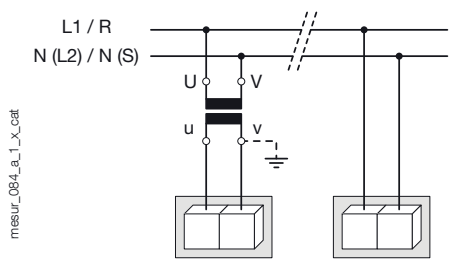

References

Normal indication with 90° pointer deflection

Direct connection					
	DIN 48x48 D48A90-V	DIN 72x72 D72A90-V	DIN 96x96 D96A90-V	ROTEX 72x72 R72A90-V	ROTEX 96x96 R96A90-V
Rating	Reference	Reference	Reference	Reference	Reference
0 - 150 V	192G 1003				
0 - 250 V	192G 1004	192G 1104	192G 1204	192G 2104	
0 - 300 V		192G 1105		192G 2105	
0 - 500 V	192G 1007	192G 1107	192G 1207	192G 2107	192G 2207
0 - 600 V			192G 1208		