


Cable clamps and cage terminals

Distribution system

The solution for

- > Electrical distribution



Conformity to standards

Cable clamps:


- > IEC 61439-1
- > DIN 46206



Cage terminals

- > IEC 60947-1
(if mounted to SOCOMEC devices)
- > NF C 63-060
- > NF C 63-062

serie_001

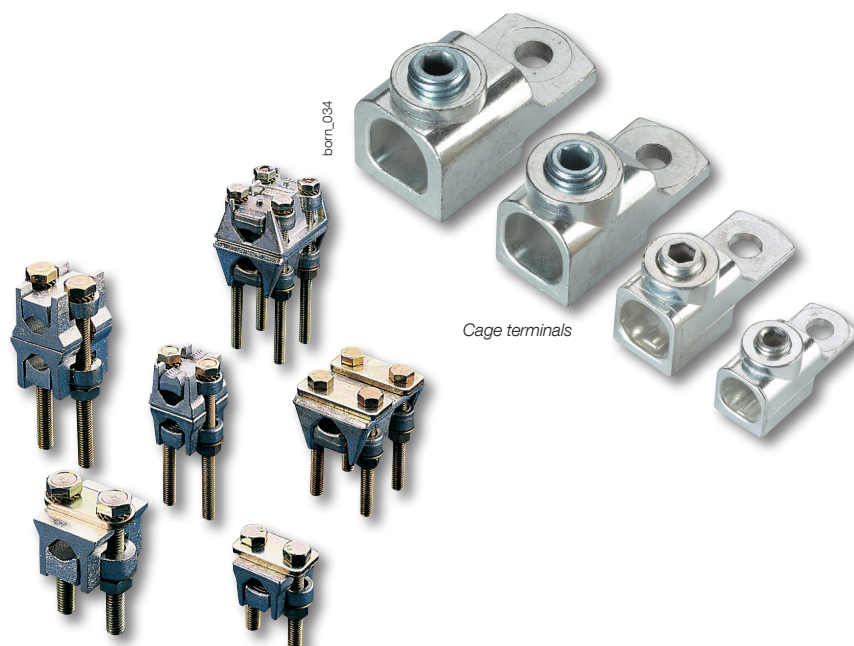

Cable clamps

Cage terminals

Function

SOCOMEC **power cable clamps** ensure the connection of copper or aluminium cables onto power terminals or busbars. These tinned clamps provide increased mechanical strength and high resistance to humidity (supplied "tropicalised").

SOCOMEC **cage terminals** are connection accessories that can be fixed onto the power terminals of SOCOMEC load break switches, changeover switches and fuse combination switches. They enable a direct terminal-free connection to rigid copper and aluminium conductors, with integration under the IP2 protective cover.

Characteristics

Cable clamps

- 2 connection cross-section ranges from 35 to 300 mm².
- 2 cable clamp models with bracket mounting: single-double.

Cage terminals

- Ratings: 160 to 630 A.
- Number of poles: 3 and 4.
- Material: tin-plated aluminium.


Single cable clamps

References

Connection capacity (mm ²)	Ø max. cabling (mm)	Corresponding power terminals	Reference
35 ... 185	17	Type 4	4500 0013
150 ... 300	25	Type 5	4500 0028

Connection capacity (mm ²)	A	B	C	J
35 ... 185	42	48	35	26
150 ... 300	53	50	60	33

Dimensions

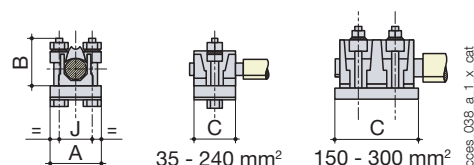

access_038_a_1_x_cat


Double cable clamps

References

Connection capacity (mm ²)	Ø max. cabling (mm)	Corresponding power terminals	Reference
35 ... 185	17	Type 4	4500 0031
150 ... 300	25	Type 5	4500 0034

Dimensions

Connection capacity (mm ²)	A	B	C	J	J ₁
35 ... 185	42	48	35	26	
150 ... 300	53	50	60	33	33

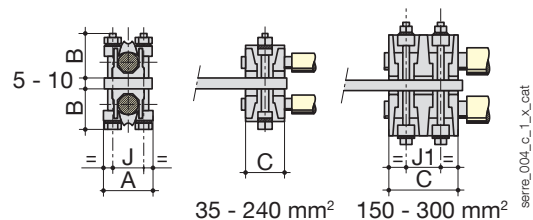


Single cage terminals

References

Connection capacity (mm ²)	Switch rating (A)	No. of poles	Tightening torque (Nm)	Flexible bar width (mm)	Reference
16 ... 95	160	3 P	14	13	5400 3016
16 ... 95	160	4 P	14	13	5400 4016
16 ... 185	250	3 P	25	18	5400 3025
16 ... 185	250	4 P	25	18	5400 4025
50 ... 240	400	3 P	45	20	5400 3040
50 ... 240	400	4 P	45	20	5400 4040
70 ... 300	630	3 P	45	24	5400 3063
70 ... 300	630	4 P	45	24	5400 4063

Dimensions

Switch rating (A)	A	A ₁	C	E	R	T	ØX	X ₁	Z
160	47.5	22.5	25	12	20	3.5	8.5	M12	10
250	62	31.5	31.5	16.5	25	2.5	10.5	M16	14
400	71.5	32	38	9	32	5	10.5	M20	15
630	76.5	37	38	9	40	5	12.5	M20	15



Double cage terminals

References

Connection capacity (mm ²)	Switch rating (A)	No. of poles	Tightening torque (Nm)	Flexible bar width (mm)	Reference
16 ... 95	160	3 P	14	13	5400 3216
16 ... 95	160	4 P	14	13	5400 4216
16 ... 185	250	3 P	25	18	5400 3225
16 ... 185	250	4 P	25	18	5400 4225
50 ... 240	400	3 P	45	20	5400 3240
50 ... 240	400	4 P	45	20	5400 4240
70 ... 300	630	3 P	45	24	5400 3263
70 ... 300	630	4 P	45	24	5400 4263

Dimensions

Switch rating (A)	A	A ₁	C	E	R	T	ØX	X ₁	Z
160	47.5	22.5	25	12	20	3.5	8.5	M12	10
250	62	31.5	31.5	16.5	25	2.5	10.5	M16	14
400	71.5	32	38	9	32	5	10.5	M20	15
630	76.5	37	38	9	40	5	12.5	M20	15

