



ISOM Digiware D-55h

Control and power supply interfaces
for medical premises

Insulation
monitoring



ISOM Digiware D-55h



Configuration
with Easy Config System.

Function

ISOM Digiware D-55h remote screens give you:

- A local visualisation of data from ISOM Digiware L-60h and F-60 modules, but also from the other modules connected to the Digiware network or from COUNTIS E and DIRIS A over the RS485 bus
- Power supply of Digiware modules
- Access to this data over Ethernet

Via an RS485 connection, the ISOM Digiware screen also acts as a gateway, centralising all information from other ISOM devices and making this information available over Ethernet.

The screen can also be used in medical facilities (optional recessed housing integration kit) for use as an alarm relay.

Advantages

High-resolution graphic screen

The screen displays various graphical objects such as bar graphs and insulation curves with measurement cursors.

Secure power supply

The 24 VDC power supply prevents hazardous voltages on the cabinet doors.

Ergonomic and easy to use

With its 10 buttons on the front panel, you can quickly access the measurement information. The Quick-Access button lets you quickly and easily navigate between the main operating screens.

It also makes it easy to select and configure equipment and circuits.

Centralising measurement points:

- Selecting the circuit
- Viewing the data

Email notifications


In the event of an alarm, the device can automatically send an email to prevent use (e.g. if there is an insulation fault).

Alert reporting for medical facilities

The device can also be used as an alarm indicator (Ethernet connection). It shows alarms related to insulation control and transformer overheating and overloading.

The solution for

- > Operating rooms
- > Anaesthesia rooms
- > Recovery rooms
- > Invasive imaging rooms

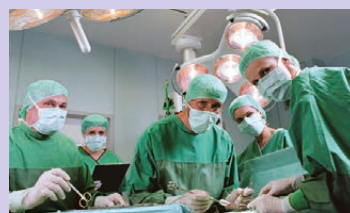

Strong points

- > High-resolution graphic screen
- > Secure power supply
- > Ergonomic and easy to use
- > Centralising measurement points
- > Email notifications
- > Alert reporting for medical facilities

Conformity to standards

- > IEC 61557-8
- > IEC 61557-9
- > IEC 61557-12
- > ISO 14025



Approvals and certifications

- > Naval certifications

Create your project


- > Find the best Digiware configuration:
www.meter-selector.com

METER SELECTOR
DIGITAL TOOL AVAILABLE

ISOM Digiware D-55h


Control and power supply interfaces
for medical premises

Front panel

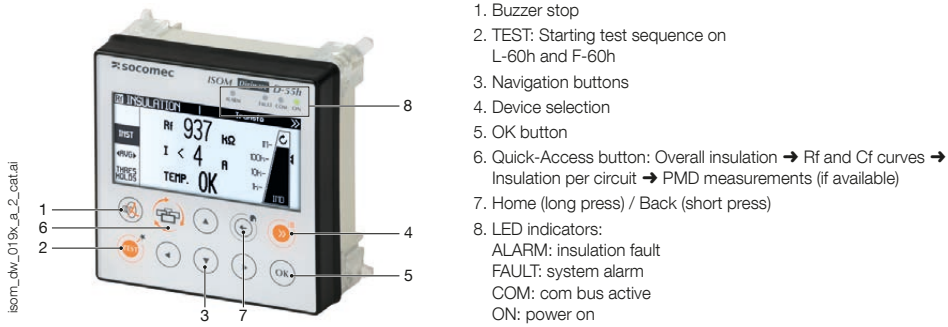


Dimensions (mm)

On door cutout DIN 96 x 96 mm

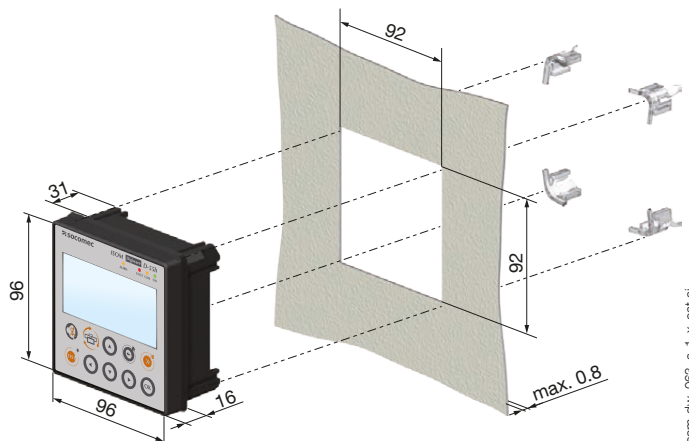

Connections

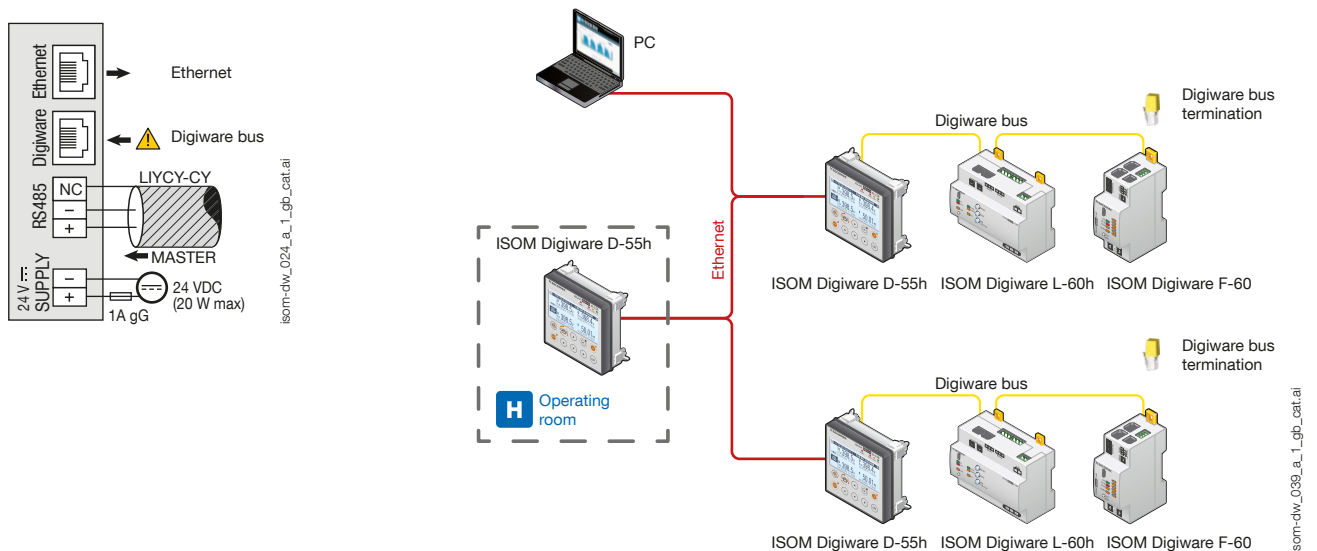

ISOM Digiware D-55h

Control and power supply interfaces

for medical premises

Characteristics

Digiware bus		Communication	
Function	Connection between DIRIS Digiware modules	Ethernet RJ45 10/100 Mbs	Gateway function: Modbus TCP
Cable type	Specific Socomec cable with RJ45 connection	RJ45 Digiware	Control and power supply interface function
RS485		RS485 2-3 wires	Communication function with Modbus RTU slaves
Connection type	2 to 3 half duplex wires	USB	Upgrade and configuration via type B micro USB connector
Protocol	Modbus RTU	Ports	
Baudrate	1200 to 115200 bauds	Inputs	Digiware, RS485
Mechanical specifications		Outputs	Ethernet RJ45
Type of screen	Capacitive touch-screen technology, 10 keys	Environmental specifications	
Screen resolution	350 x 160 pixels	Storage temperature	-40 to 70 °C
Front panel protection degree	IP65	Operating temperature	-10 to +55 °C
Electrical specifications		Humidity	95% at 55 °C
Power supply	24 VDC +10% / -20%	Installation category, degree of pollution	CAT III, 2
Power consumption	2.5 VA		

References

Standard display model		Reference	
D-55h	Multipoint display, Ethernet output	4729 0204	
Power supply		Reference	
P15	Power supply 100-240 VAC / 24 VDC 15 W	4829 0120	
P30	Power supply 100-240 VAC / 24 VDC 30 W	4729 0603	
Accessories		Available for order in multiples of	Reference
Enclosed wall mounting accessory (recessed housing)			4729 0292
Fuse holder, 1 pole + neutral to protect input voltages (RM)		4	5701 0017
gG 10x38 1 A fuses		10	6012 0001
DIN rail mounting kit for D-55h monitors			4829 0230
144 x 96 mm DIN door mounting kit			4729 0290
IP 65 flexible cover for 144 x 96 mm door mounting frame			4729 0291
Digiware connection cables			Reference
RJ45 cables for Digiware Bus	Length 0.06 m		4829 0189
	Length 0.10 m		4829 0181
	Length 0.20 m		4829 0188
	Length 0.50 m		4829 0182
	Length 1 m		4829 0183
	Length 2 m		4829 0184
	Length 3 m		4829 0190
	Length 5 m		4829 0186
	Length 10 m		4829 0187
	50 m reel + 100 connectors		4829 0185
Termination for Digiware Bus (supplied with interfaces C and D)			4829 0180
USB configuration cable			4829 0050

Want to monitor your systems?

WEBVIEW-M solution built into the ISOM Digiware D-75 display

The ISOM Digiware D-75 display centralises data from modules in the Digiware range. It embeds the WEBVIEW-M software allowing remote visualisation, monitoring and use of measurement data and the insulation level of the electrical system.



System requirement:
WEBVIEW-M is built into
the ISOM Digiware D-75.



ISOM Digiware D-75 is
ready to be connected
to a Cloud platform.



Display of multi-product
electrical parameters on
a customised platform
like an electrical circuit
diagram or a site
drawing.

Expert Services

Socomec offers a range of services to help you optimise your electrical installations and increase efficiency:

Pre-project & installation

- Inspecting the installation
- Commissioning the equipment
- Training for operative teams

Operation

- Checking the insulation monitoring architecture (NFC 15100)
- Fault-finding
- Training on the handheld fault location tool, ISOM PS-62

To find out more, ask your Socomec representative.