


WEBVIEW

Embedded software for power monitoring and management

up to 200 devices

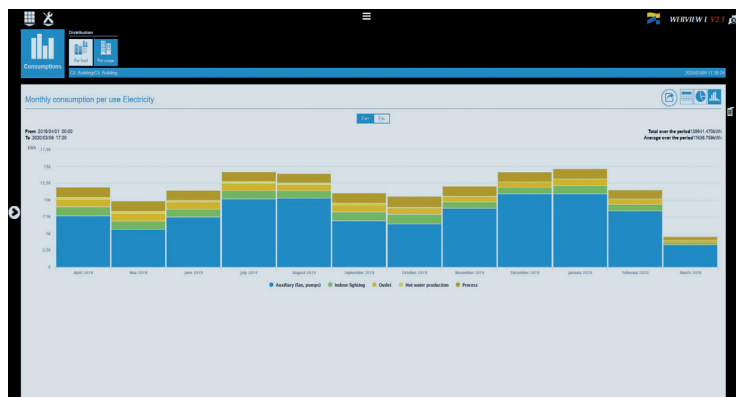

The solution for

- > Healthcare
- > Industry



Strong points

- > Plug & Play
- > Easy to use
- > Various functions

Conformity to standards

- > IEC 62974-1⁽¹⁾



(1) Energy Server standard applicable to WEBVIEW-M and L versions embedded in DIRIS Digiware M-70/D-70 and DATALOG H80.

Function

WEBVIEW is web based software embedded in DIRIS A-40 Power Monitoring Devices, DIRIS Digiware D-70 displays, DIRIS Digiware M-70 communication gateways and DATALOG H80/H81 dataloggers delivering real-time monitoring of all measurements from up to 200 devices and displaying the breakdown of energy consumptions. User can access WEBVIEW via a web browser on a PC or a tablet. Uncover the causes of electrical disturbances and anticipate maintenance requirements thanks to history of multiple electrical parameters.

Pre-set alarms defined by the user can sent by email. User can access WEBVIEW via a web browser on a PC or a tablet.

Advantages

Plug & Play

Quickly configure WEBVIEW thanks to the automatic detection of Socomec devices. Create geographical and electrical hierarchies to reflect your installation and your processes.

Easy to use

WEBVIEW centralises measurements from all downstream devices via a single clear and user friendly interface. The ergonomics of each screen enable users to easily and quickly analyse the parameters and the behaviour of the installation.

Various functions

Very easy to configure and to use, WEBVIEW offers a wide range of functions including real time monitoring, alarm management and notification by email, multi-utility analysis (electricity, water, gas), power parameter logging and allocation of consumption by end-use and location.

General characteristics

- Web-based software that can be accessed from any browser.
- Max. 200 devices with WEBVIEW-L.
- Max. 32 devices with WEBVIEW-M.
- Real-time visualisation, analysis of trends and consumption, alarms.

Characteristics

Type	Hosting	Functions	Number of measurement devices
WEBVIEW-S	DIRIS A-40	Monitor, Alarm, Analyse	1
WEBVIEW-M	DIRIS Digiware M-70	Monitor, Alarm, Analyse, Photoview	32
	DIRIS Digiware D-70	Monitor, Alarm, Analyse, Photoview	32
WEBVIEW-L	DATALOG H80/H81	Monitor, Alarm, Analyse, Photoview	100/200

Functions

Display


- Automatic detection of connected devices.
- Summary of the parameters measured for the electrical network and loads.
- Display of voltage, current, power, power factor, total harmonic distortion (THD) and harmonics per rank.
- Display of average/instantaneous values with min/max limits depending on the devices.
- Viewing of energy index with total and partial metering per load.
- Input/output state.
- Synchronisation of device clocks.
- Graphical or table representation.



soft_076.eps

Alarm


- Alarms for exceeded thresholds, events and input state changes.
- Display of alarms history.
- Multiple-criteria filtering to simplify the analysis by type, nature, criticality or state.
- Alarm displayed on the main page.
- Alarm notification by email (SMTP).

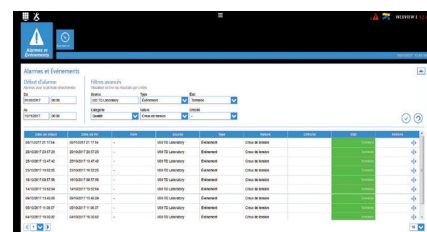

soft_074.eps

Analysis


- Measurement and consumption history.
- History of several electrical parameters.
- Breakdown of consumption by location, by end-use and by utility type (water, gas, electricity, etc.).
- Export of consumption data in CSV format.

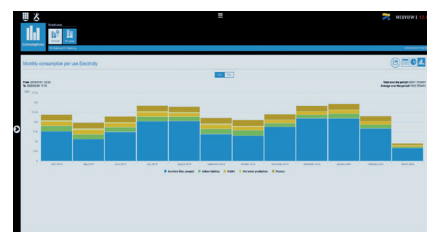

soft_075.eps

Photoview

- Photoview: customised dashboard of the WEBVIEW environment via the upload of graphical files (building plans, electrical circuit diagrams, production processes, etc.).
- Real time monitoring via drag and drop of parameters on the background pictures (measurement points, alarms, text, etc.).
- Display of the mapping of the measurement plan by cascading of several images.

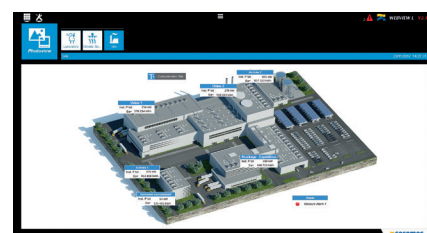

soft_064.eps

References

Type	Host device	Reference
WEBVIEW-S	DIRIS A-40	4825 0501
WEBVIEW-M	DIRIS Digiware M-70	4829 0222
	DIRIS Digiware D-70	4829 0203
WEBVIEW-L 100	DATALOG H80	4854 0020
	DATALOG H81 (4G network)	4854 0021
WEBVIEW-L 200	DATALOG H80	4854 0030
	DATALOG H81 (4G network)	4854 0031